

# 2.54mm(.100") Wire To Wire And Wire To Board Connector





Shenzhen Hongru Connector Co., Ltd

**SPECIFICATIONS:**

- Current Rating:3AAC,DC
- Voltage Rating:250V AC,DC
- Operating Temperature:-40℃~+105℃
- Contact Resistance:10mΩ max.
- Insulation Resistance:5000MΩ Min.
- Withstanding Voltage:750V AC/minute
- Material:Nylon66 UL94V-0
- Use With:M2050Series

Email: yukyli@hrb-connector.com  
 Tel: 86-0755- 2709 6669  
 Fax: 86-0755-2709 2392  
 Skype: haiyuncheng-vivian  
 Mobile(Whatsapp): 86-186 8112 3590  
 Website: <http://www.hrb-connector.com>

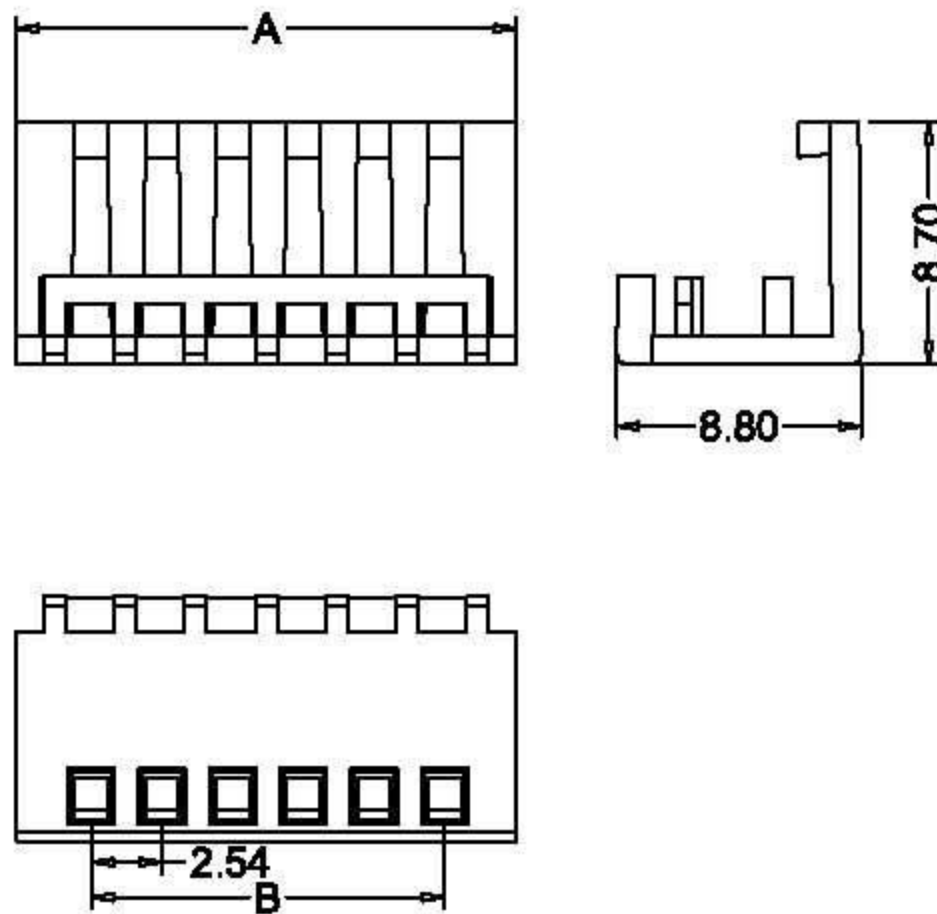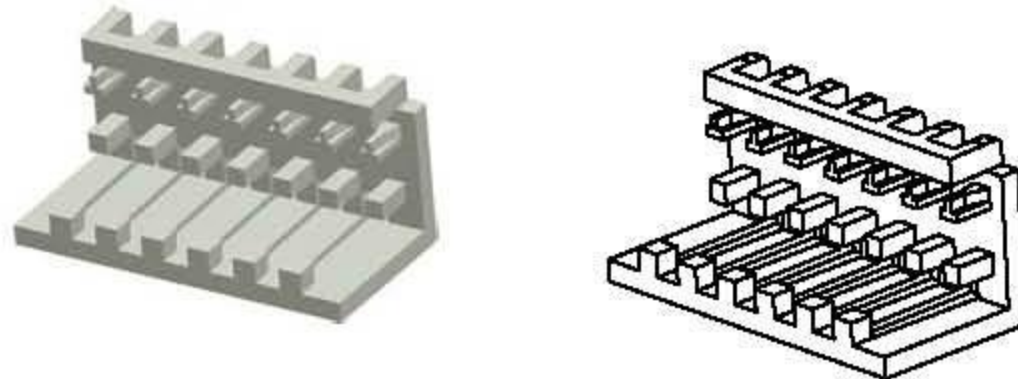

## Ordering Information And Dimensions

Part NO.		Dimensions		Part NO.		Dimensions		Part NO.		Dimensions	
TYP UL94V-0	Circuits	Dim:A	Dim:B	TYP UL94V-0	Circuits	Dim:A	Dim:B	TYP UL94V-0	Circuits	Dim:A	Dim:B
M2052R-2-W	2	5.05	2.54	M2052R-9-W	9	22.83	20.32	M2052R-16-W	16	40.61	38.10
M2052R-3-W	3	7.60	5.08	M2052R-10-W	10	25.37	22.86	M2052R-17-W	17	43.15	38.10
M2052R-4-W	4	10.14	7.62	M2052R-11-W	11	27.91	25.40	M2052R-18-W	18	45.69	22.86
M2052R-5-W	5	12.67	10.16	M2052R-12-W	12	30.45	27.94	M2052R-19-W	19	48.23	25.40
M2052R-6-W	6	15.21	12.70	M2052R-13-W	13	32.99	30.48	M2052R-20-W	20	50.77	27.94
M2052R-7-W	7	17.75	15.24	M2052R-14-W	14	35.53	33.02	M2052R-22-W	22	55.85	33.02
M2052R-8-W	8	20.29	17.78	M2052R-15-W	15	38.07	35.56				

